




All products made-to-order

Eurospan | Ceiling

► System

A system of three components that works in virtually any space and to create truly custom acoustical surfaces. With thousands of finishes compatible, whether it's discrete or jaw-dropping is up to you.

Items to specify

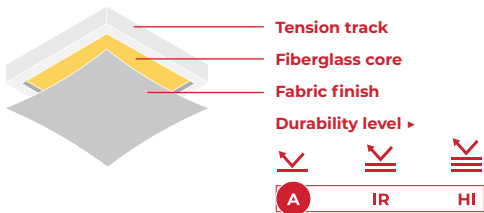

Click for full specsheet
conwed.com/specsheet-eurospan-ceiling

Track types

- Square perimeter, edge wrap, outside corner, & mid-seam track
- Bevel perimeter & mid-joint track
- Radius perimeter & mid-joint track
- conwed.com/eurospan-track-profiles

Edge profile



Thicknesses

System can be furred out to desired thickness. NAF core available for thicknesses 1" or 2".


Eurospan ceiling finishes

Eurospan PRIME

Designed in-house specifically for the Eurospan Ceiling System, this textile has an ideal lock knit structure & weight for easy installation and opaqueness for minimal shadowing.

EOS

Designed in-house specifically for the Eurospan Ceiling System, this textile has an ideal lock knit structure & weight for easy installation and opaqueness for minimal shadowing.



	Widths	Lengths
Eurospan PRIME	10', 13', 16'	Custom
Classic Eurospan Fabrics	10', 13', 16'	Custom
EOS	16'	Custom

Compatible brands*

Carnegie kvadrat DESIGNTEX maharam
Knoll Guilford of Maine
*Designer textile widths vary



Fire rating

Conwed products meet or exceed ASTM E84 standards for smoke development and flame spread on a component level.



Shapes

This system can be made into different shapes, and bend over an axis using different track pieces. Contact Customer Service for more info on how we can support your project.



Washable

Refer to the Maintenance & Cleaning Guide for more details.
conwed.com/cexp-maintenanceandcleaning



Sustainability

For your LEED projects, our products can help you qualify for different points depending on the product you choose. Contact us to learn more detailed information.
To view our certificate visit conwed.com/cexp-LEED.



Warranty

10 years. Refer to Warranty for more details.
conwed.com/cexp-eurospanwarranty

Acoustic performance

The NRC of the products are determined from an average of sound absorption coefficients, obtained from tests conducted according to ASTM C423 procedures in an NVLAP accredited laboratory.

HZ →	125	250	500	1000	2000	4000	NRC ↓
1 ½"	0.13	0.32	0.76	1.00	1.13	1.07	0.80
1 ½"	-0.01	0.33	0.91	1.09	1.03	0.85	0.85



Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.

Click for latest document version
conwed.com/datasheet-eurospan-ceiling